

Thermo Scientific Dionex UltiMate 3000 Standard Systems

Optimum HPLC

With support for pressures up to 620 bar (9,000 psi) at flow rates of up to 10 mL/min, detector data collection rates up to 100 Hz, and injection cycle times as low as 15 s, the Thermo Scientific™ Dionex™ UltiMate™ 3000 standard systems fully support conventional methods while offering compatibility with UHPLC applications.




Standard Systems

more UHPLC for all
Precise • Robust • Versatile

Contact Details:

Dr.A.Geethakarthy, Associate Professor, Analytical Instrumentation lab, Civil Engg., KCT – Mobile: 9443452576

Office, Dept. of Civil Engg. – 0422- 2661260

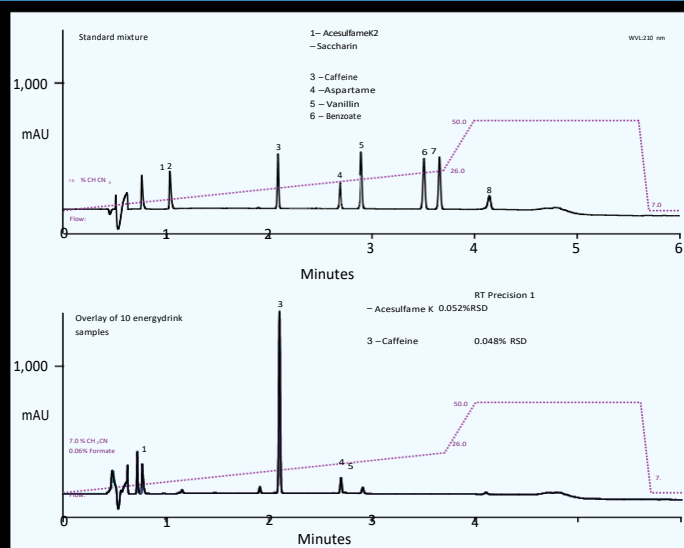

Kumaraguru College of Technology

Department of Civil Engineering,

Analytical Instrumentation Laboratory, Coimbatore – 641 049.